



TECNOPIOS GMA®

SOLUCIONES EN RECUBRIMIENTOS

PISOS EN ROLLO TARKETT

Cel: 314-821-9866

HETEROGENEOUS
COMPACT VINYL

Acczent Excellence 70 Ruby

Specification

Printed compact vinyl floorcovering on a glass fiber stabilized carrier, filler free wear layer.
PUR reinforcement, built with a fungistatic and bacteriostatic Sanitized® treatment.
Product standard ISO 10582 - EN 649.

CERTIFICATION & CLASSIFICATION	STANDARDS	Acczent Excellence 70 Ruby
Type of floorcovering	ISO 10582 - EN 649	Heterogeneous compact vinyl
CE certification	EN 14041	Yes
Classification	ISO 10874 - EN 685	Commercial: 34 Industrial: 43

TECHNICAL CHARACTERISTICS	STANDARDS	Acczent Excellence 70 Ruby
Wear layer thickness	ISO 24340 - EN 429	0.70 mm
Surface treatment		TopClean
Total thickness	ISO 24346 - EN 428	2.0 mm
Total weight g/m²	ISO 23997 - EN 430	3 000
Form of delivery	ISO 24341 - EN 426 Sheet (rolls)	approx. 23 running metres x 2 m / 4 m

TECHNICAL PERFORMANCES	STANDARDS	Acczent Excellence 70 Ruby
Dimensional stability	ISO 23999 - EN 434	≤ 0.10 %
Reaction to fire	EN 13501-1	B _{fl} s1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) and over any derivative wood substrate
Abrasion group	EN 660-2	Group T : ≤ 2 mm³
Residual indentation	ISO 24343-1 - EN 433	≤ 0.10 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Curl resultant to heat	ISO 23999 - EN 434	≤ 8 mm
Electrostatic properties	EN 1815 EN 1081	≤ 2 kV on concrete R1 > 10⁹ Ω
Thermal resistance Underfloor heating	EN 10456	0.02 m²K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	ISO 26987 - EN 423	High resistance
Bacteriostatic effect Anti fungi treatment resistance to microb and bacteria	ISO 22196:2007	Sanitized® Bacteriostatic effect at 99.99% Fungistatic effect
Slip resistance	DIN 51130 EN 13893	R10 ≥ 0.3
Colours		36 (Nature: 23 - Wood: 13)

The above information is subject to modification for the benefit of further improvement. (02/12).

CUSTOMS TARIFF : 482050000000F


Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

Tarkett's commitments to VOC* emissions

Currently, all floorings that Tarkett manufactures have VOC emissions of less than 100 µg/m³ (TVOC after 28 days) contributing to better interior air quality. This makes Tarkett an industry reference for VOC reduction with floorings that have 10 times less VOC emissions than current European standards.

Our commitment to better air quality in buildings and homes is a key part of our new Balanced Choice Tag. It gives information about the content of our products and how they contribute to sustainable development enabling customers to make their balanced choice.

* VOC: Volatile Organic Compound

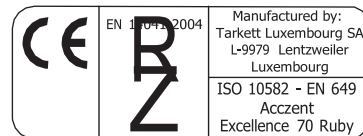

Acczent Excellence 70 Ruby	Welding Rod N°	Acczent Excellence 70 Ruby	Welding Rod N°	Acczent Excellence 70 Ruby	Welding Rod N°
029	1291 203	041	1287 032	054	1292 378
030	1291 205	042	1292 388	055	1287 252
031	1291 810	043	1287 136	056	1287 354
032	1287 153	044	1289 264	057	1287 542
033	1288 382	045	1287 468	058	1287 036
034	1292 201	046	1287 535	059	1287 159
035	1294 428	048	1291 839	060	1287 222
036	1287 536	049	1287 170	061	1287 520
037	1287 373	050	1287 533	063	1287 378
038	1291 451	051	1287 355	064	1287 283
039	1287 459	052	1287 443	065	1287 256
040	1287 549	053	1287 560	109	1287 023

